


Nuts and washers

Nuts and washers can be supplied in stainless steel AISI 316 or brass UNS-C36000.

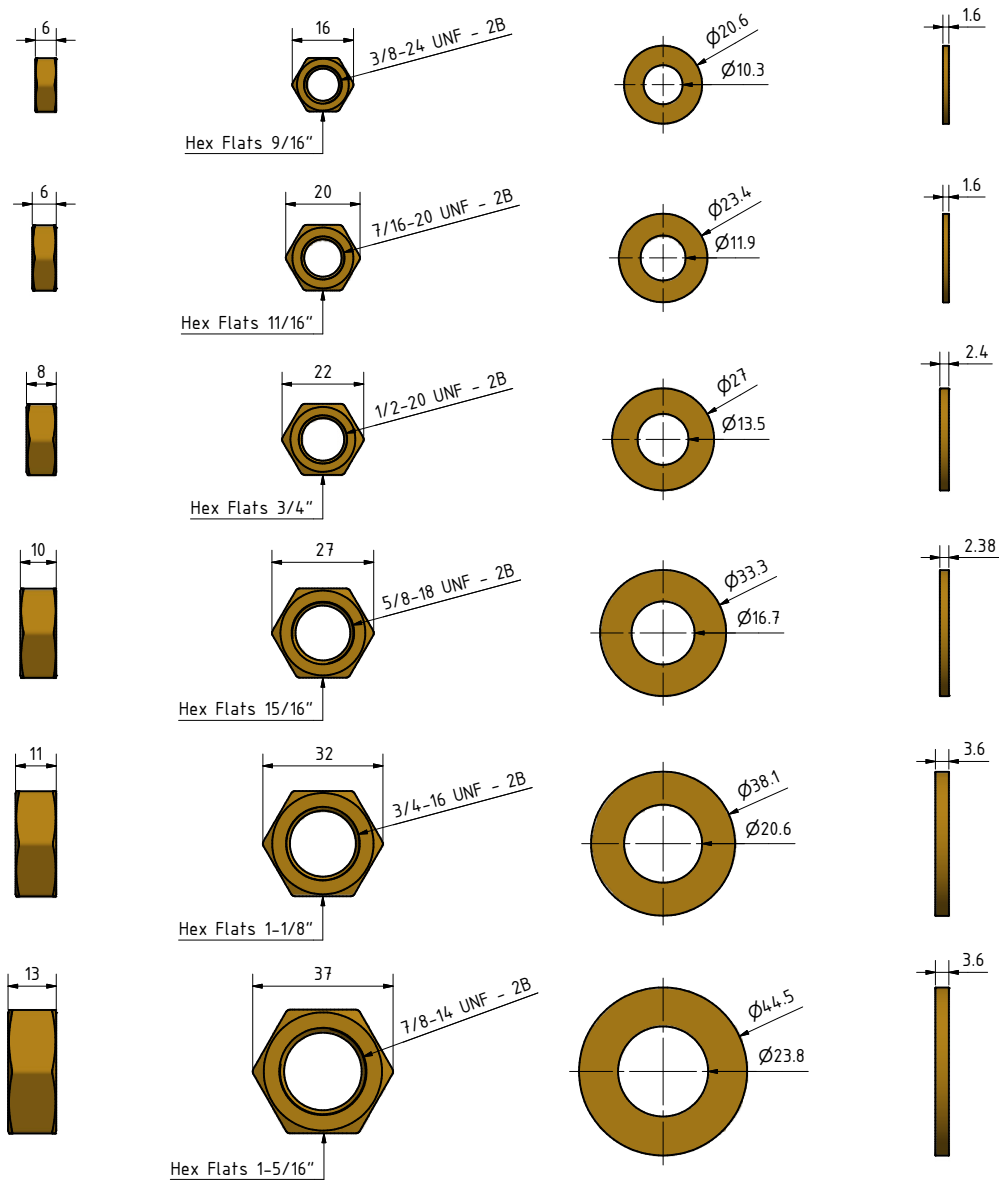

Products for handling

Isopropyl

General cleaning and removal of any accumulated sand or mud on a connector should be performed using spray based contact cleaner (isopropyl alcohol).

Loctite

MacArtney offers Loctite 5910 and Loctite 243 for locking of connectors:

- Always use Loctite 5910 to lock non-metallic (PEEK) connectors
- For locking metallic connectors, the use of Loctite 243 is recommended

Molykote 44

MacArtney offers Molykote 44 Medium in two sizes (10 ml and 100 ml), connectors must be greased with Molykote 44 Medium before every mating.